# TABLE OF CONTENTS

# Section 6 Generation Interconnection

A.	Customer-Owned Generation	
B.	Net Metered Generation	
C.	Standby Generation Connections to the District's System	6-6
D.	Closed Transition Transfer Switch Requirements	
E.	All other Generation to be Interconnected to the District's System	
F.	Solar Generation Production Metering	6-16
G.	Application Forms	-17 Through 6-22

# Forms

# Section 6 GENERATION INTERCONNECTION FORMS

Form 6-1Preliminary Generation Application	6-17 & 6-18
Form 6-2Final Generation Application	19 Through 6-22



# CUSTOMER-OWNED AND MERCHANT GENERATION INTERCONNECTION

### A. CUSTOMER-OWNED GENERATION

#### 1. Introduction:

Customers may request interconnection of generation projects for various purposes. The District will review each interconnection request using processes and criteria appropriate for the given project. In connecting generation of any type to the District's electric system, the resulting system shall:

- Ensure the safety of the general public and District personnel.
- *Minimize possibility of damage to property.*
- Minimize adverse service impacts to District customers.
- Minimize adverse electric system and operational impacts to the District.
- Adhere to District standards and operational requirements.
- Not cause adverse rate impacts to District customers.
- Permit safe and efficient operation of the generation project.

Customers wishing to interconnect generation with the District electric system should contact the District as early in the planning process as possible. This allows an orderly process in which project requirements can be identified in a timely, professional manner, and which allows for any necessary upgrades to the District's electrical system to be completed as required to meet project timelines.

#### In addition, customers are urged not to purchase equipment or enter into any final purchase agreements until project requirements have been finalized and the District has reviewed and approved the project design.

Note: For purposes of this policy document, "customer" includes both current District customers served under one of its retail electric rate schedules and entities that are not currently District electric customers, but who intend to build generation in the District's service territory.

### 2. Net Metering:

Net metering allows customers with certain types of small generating facilities to return electricity generated in excess of their immediate needs to the District for credit on their energy bill. Projects up to 100 kilowatts which use energy from solar, wind, water, biogas from animal waste, or combined heat and power technologies (including fuel cells) to generate electricity may be eligible to participate in the District's Net Metering Program. Participating customers connect their generating equipment to, and operate in parallel with, the District's electrical distribution system and receive a credit on their bill for energy returned to the system.



The District uses a streamlined application process and standardized requirements for interconnection and net metering of inverter-based systems that have been certified to meet the standards of UL-1741. Refer to Section B (below) for details.

#### 3. Standby Generation:

Standby, or emergency backup generation, which is intended to operate in parallel with the District's electric system, will be evaluated on a case by case basis, and requirements identified which will minimize the likelihood of negative operational or safety impacts to the utility system.

Application for these interconnections is made using Form 6-1, Preliminary Application. Refer to Section C (below) for details.

#### 4. All other Generation to be Interconnected to the District's Electrical System:

For all generation projects other than net metering or backup standby generation, the technical interconnection requirements will be based on the expected impact the project will have on the District electrical system. Requirements are project-specific, and are developed through District studies of the system.

Following an initial, high-level, Feasibility Review, more detailed studies may be required. These may include a System Impact Study and/or Interconnection Facilities Study. The District or its consultant performs these studies at the customer's cost.

#### **B. NET METERED GENERATION**

#### 1. Introduction:

Projects up to 100 kW that use energy from solar, wind, water, biogas from animal waste, or combined heat and power (including fuel cells) may be eligible for net metering in accordance with state law (RCW 80.60).

#### 2. Application:

Application for a net metered interconnection is made through the Customer Renewables group. These applications can be found on the District website snopud.com/netmetering.

#### 3. Technical Review:

The technical review is intended to ensure that the generation can connect safely to the District's electrical system without negatively impacting service to other customers.

For single-phase projects connecting to single-phase transformers at secondary voltages through an inverter which is compliant with UL 1741, which require no modifications to the District's electrical system, and for which total connected generation on the circuit is less than 15% of the circuit's peak load, an expedited review and standardized technical requirements apply.



For projects larger than 25 kW, for projects not connecting through a UL 1741 inverter, for projects connecting at primary voltages, or for projects requiring modifications to the District's electrical system beyond a meter change, a more detailed technical review will be required. The technical review will consider the following:

- Project capacity as compared to the service wire capability or the transformer nameplate;
- Imbalance created by connecting the generation to a center tap of a 240 Volt • service:
- Total aggregated generation connected on the line section;
- Total aggregated generation connected on the circuit; and
- Existing and proposed available short circuit current at the point on the District feeder where the generation is to connect.

#### 4. Technical Requirements:

In order to comply with State worker safety laws, all projects must include a visible-open disconnect switch located electrically between the generation equipment and the District's electrical system. The switch must be accessible at all times to District personnel, and must be capable of being locked open using a District padlock. Guidelines for placement of the switch are available. Links are available in the Sample Documents section.

#### *Note: Projects 50 kW and greater must be three-phase.*

For all projects, the District metering must be modified in order to credit the customer's account for energy delivered to the District, and if applicable, accurately track production of electricity for State incentive programs.

The customer must provide a certificate of completion showing inspection of the system by the electrical inspector having jurisdiction over the installation.

Correct operation of any required protective devices must be demonstrated to the District's representative before the project can begin operation.

#### 5. Standardized Technical Requirements for Small Net-Metered Systems:

For projects up to 25 kW, connecting to single-phase transformers at secondary voltages of 120/240 volts, through a self-contained meter, and for which total connected generation on the circuit is less than 15% of the circuit's peak load, an inverter which is compliant with UL 1741 specifications satisfies the protective equipment requirement. In addition, a waiver may be granted for the disconnect switch. In these cases, the meter base will serve as the disconnect for utility work clearances.

Where standardized requirements do not apply, technical requirements specific to the project will be issued by the District's System Planning and Protection Department.



#### 6. Agreements:

In addition to any agreements regarding District financing or incentives, a Net Metering Agreement must be completed before the project is initially energized.

An Interconnection Agreement must be executed. This outlines the interconnection requirements, billing and revenue agreements, and ongoing maintenance and operation requirements.

#### 7. Operation:

When required for District line work, the generation will be disconnected. If the work is planned, the District will make efforts to provide advance notice. For emergency conditions, no advance notice can be given.

#### 8. Sample Documents:

Sample documents can be found at:

Net Metering Agreement, Interconnection Application:

http://www.snopud.com/home/green/RevisedSECont.ashx?p=2440

Solar Generation Production Metering and Disconnect Switch Installation Guidelines:

http://www.snopud.com/home/green/RevisedSECont.ashx?p=2440

## C. STANDBY GENERATION CONNECTIONS TO THE DISTRICT'S SYSTEM:

#### 1. Introduction:

Emergency generation as covered in NEC Articles 700 through 705 may be connected to customer load by utilizing either an open transition transfer switch or a closed transition transfer switch. Typically, backup generation is provided using synchronous rotating machines.

Any generation which will operate in parallel with the District's electrical system has the potential to impact safe operation of the system and service to other customers. All projects will be evaluated to determine the extent of the possible impacts and identify project requirements to minimize the probability of adverse effects.

### 2. Application:

Customers should submit Form 6-1, Preliminary Application for Operation of Customer-Owned Generation well in advance of project initiation. Generator and transfer switch information are provided on this form and are used by District personnel in identifying project parameters.

It is especially important to note whether the transition switch is capable of operating with both positions closed, so that the generation operates in parallel with the District's electrical system, and for how long the parallel is designed to last. An electrical one-line diagram showing connection to the District electrical system should also be included with the application.



Customers proposing to operate generation in parallel with the District electrical system should submit their final application using Form 6-2, Final Application for Operation of Customer-Owned Generation.

The District will use information from the application to model the generation at the District circuit to which it connects so that the electrical performance can be evaluated. Characteristics of the transfer switch are also important. While operation as intended generally does not cause system disturbances, the consequences of other modes of operation must also be considered. Failure of a single device shall not result in loss of protection for a system.

#### 3. Technical Review:

District customers may use a closed transition transfer switch in a make before break mode to momentarily parallel an emergency generator to the District's electric system when the District's electric system is also energized. Closed transition switching shifts load between an emergency generator and the District system without dropping load.

Closed transition switching is normally used for periodic emergency generator testing or after the District has restored electric service subsequent to an outage. The closed transition transfer switch must meet specific requirements.

The technical review will consider the operational modes available and proposed for the transfer switch. If the generation will be connected through a make before break transfer switch, paralleling the generation with the District system, it may be necessary to provide relays to detect an inadvertent extended period of parallel operation.

#### 4. Technical Requirements:

The District will provide interconnection technical requirements for each project, which must be incorporated into the system design.

Generation connecting through a closed-transition transfer switch must meet the following requirements:

- 1. The closed transition transfer switch must be UL/ANSI Standard 1008 listed, and must be labeled as such.
- 2. The installation and operation of the closed transition transfer switch and the emergency generator shall comply with NEC Articles 700-705.
- 3. The closed transition transfer switch shall function in the closed transition mode only when the District source and the backup generation source are energized and in synchronism. For all other transfers, the switch must operate in a break before make mode.
- 4. If the closed transition, make before break, transfer mode is intended to parallel the District electric system with the backup generation system for more than 100 milliseconds, or if the aggregate generation is 1 MW or greater, protection must be provided to disconnect the generation system in the event of a fault on the District electric system.



- 5. The closed transition, make before break, transfer mode must be supervised and controlled by a customer owned synchronism check relay and the transfer shall take place only when both the District source and the backup generation source are within 5% of each other in voltage, within 0.2 Hz in frequency, and within five electrical degrees in phase.
- 6. The normal operation of the closed transition transfer switch shall not cause objectionable electrical disturbances external to the customer, as determined by the District.
- 7. The customer will be responsible for the protection of its facilities from any voltage or frequency excursions that occur on the District system. This includes any voltage and frequency excursions that occur during the closed transition transfer.
- 8. A District-owned visible disconnect switch will be installed at all points of interconnection to the District system at the customer's expense. The disconnect switch(es) shall be equipped with a lockable mechanism for clearance tagging to provide a visible air gap to ensure isolation of the customer generators from the District system.

Customers must provide documentation showing equipment installed to meet the requirements along with their final application (Form 6-2). This includes but is not limited to:

- Final electrical one-line diagram
- Equipment parameters and ratings
- AC and DC schematic drawings
- Three-line diagrams showing protective devices and their control outputs
- Any pertinent information regarding normal operating modes
- Relay styles and part numbers
- Relay settings proposed
- Test plan

Generally, because the intended operation of standby generation does not involve export of power to the District for sale or exchange, standard metering is applied, and protection can be provided by a device that measures power flowing out of the facility and acts to disconnect the generation after some time delay.

#### 5. Design:

Once the District provides interconnection technical requirements for the project, the customer may proceed with design of the project.

Before equipment is purchased and construction begins, the District will review the customer's final interconnection design to verify that operation will be as intended. The review will encompass the following customer documents:



#### Detailed one-line diagram of the entire Generating Facility

*This drawing shows the functional arrangement of all interconnection and generation equipment, and must include a table showing equipment ratings.* 

#### AC current and potential schematic of the Generating Facility

The AC schematic is a primary three-line drawing showing the phasing and interconnection of the current and voltage transformers with the interconnection protective relays. The drawings should show all grounding of equipment and should indicate polarity.

#### A control schematic of the Generating Facility

The schematic shall be functionally complete, showing all DC potential circuits with all relays and control connections to the tripping and closing coils of the interconnection breaker. Please include a contact development table for all interconnection relays and control switches used in control of the interconnection breaker.

#### Equipment specifications and details

This should include the specifications and details for transformers, circuit breakers, current transformers, voltage transformers, and any other major equipment. Transformer information should include configuration, ratings, nameplate diagram, and percent positive- and zero-sequence impedance based on the transformer's self-cooled rating. In addition, please provide model and style number for all interconnection protection relays.

#### 6. Agreements:

An Interconnection Agreement must be executed. This outlines the interconnection requirements and ongoing maintenance and operation requirements.

#### 7. Witness Testing:

Prior to system commissioning, operation of any required protective devices must be demonstrated to District representatives. The customer must submit a test plan outlining procedures and expected results for use during the witness testing.

#### 8. Operation:

When required for District line work, the generator will be disconnected. If the work is planned, the District will make efforts to provide advance notice. For emergency conditions, no advance notice can be given.

#### 9. Sample Documents:

Sample documents can be found at:

ESR Manual: Section 6 - Form 6-1 Preliminary Application for Operation of Customer-Owned Generation: *www.snopud.com/?p=1373* 



ESR Manual: Section 6 - Form 6-2 Final Application for Operation of Customer-Owned Generation: *www.snopud.com/?p=1373* 

Exhibit 5: Sample Interconnection Agreement: *www.snopud.com/?p=2621* 

#### D. ALL OTHER GENERATION TO BE INTERCONNECTED TO THE DISTRICT'S ELECTRIC SYSTEM

#### 1. Introduction:

The District will evaluate all generation projects designed to operate normally in parallel with the District's system, whether the customer intends to sell the output to the District or not, based on the generator's expected impacts to the electric system.

For projects with a nameplate capacity greater than 1 MW, Bonneville Power Administration (BPA), which acts as the Balancing Area Authority for the District, requires the project owner/operator to submit a separate interconnection request and to enter into a Balancing Authority Area Services Agreement or BAASA.

BPA will evaluate whether additional deposits and technical studies must be performed, and will determine whether additional technical requirements, metering, integration services, agreements and/or fees apply. Detailed information on how to submit an interconnection request and the BAASA is available through BPA's Interconnection Home Page at *http://www.bpa.gov/transmission/Doing%20Business/Interconnection/Pages/default.aspx*.

The District can facilitate an introductory meeting to help the customer initiate the BPA process. Note that BPA requirements are separate from, and in addition to, the District interconnection process and requirements identified below.

For projects meeting all of the following criteria, expedited processes and more standardized requirements apply:

- The project does not qualify for net metering
- Capacity of the proposed project is less than 500 kW
- The proposed connection is to a radial distribution circuit
- If the project connects through an inverter, the inverter is UL 1741 certified
- The generator is not a synchronous generator
- The generation does not exceed the lesser of the service wire capability or the nameplate of the transformer if proposed for connection to a shared secondary
- If connected to the center tap of a 240 V service, the generation does not create an imbalance between the two sides of the 240 V service of more than 5 kVA
- The aggregate nameplate capacity of all generation on the line section where the generation connects must be less than 15% of the line section's annual peak load
- Only minor upgrades to the District electrical system (<\$10,000) are required to interconnect the project



- The short-circuit current contribution of all the generation on the circuit does not exceed 10% of the distribution circuit's maximum available fault current at the primary distribution level nearest where the generation connects
- Maximum available short circuit current on the circuit proposed for connection does not exceed 87.5% of the interrupting capability of any District protective device or equipment

Projects which do not meet these criteria will require more in-depth studies to identify detailed design requirements for the customer's installation, as well as any modifications required to the District's system in order to accommodate the interconnection.

#### 2. Application:

Customers should complete and submit Form 6-1, Preliminary Application for Operation of Customer-Owned Generation to the District to indicate interest in installing generation connected to the District's system. In addition, the customer should include an electrical one-line diagram showing basic service voltages, anticipated metering location, desired point of interconnection, major facility equipment and ratings, and any pertinent information on normal operating modes and proposed in-service dates.

#### 3. Technical Review:

The District performs a technical review to identify equipment and/or operational practices needed to ensure safe, reliable operation of the project that meets the needs of both the customer and the District. Computer simulations of the existing District electrical system are used to analyze such project parameters as voltage regulation and reactive power capability of the generator, as well as short-circuit contribution, ability to detect and clear for faults and abnormalities, and the likelihood of operation in an inadvertent island mode with other District customers.

The District performs different types of studies as described below, which become increasingly detailed as additional information becomes available and as the likelihood of connecting the project increases.

#### 4. Study:

The District performs studies at various stages of project development. Each study provides specific types of information, with increasing levels of detail included as projects progress. While all studies will likely be required for larger projects, it is the customer's option whether to proceed through each study, with the opportunity to make decisions to proceed based on study results, or to combine studies in an effort to reduce the overall time required for completion of the studies.



#### a. Feasibility Review

After receiving a preliminary application (Form 6-1), the District will perform a high-level review of the proposed project to identify basic parameters of the interconnection, to determine which processes and technical requirements apply, and to provide a description of potential technical requirements for the project, along with a non-binding outline of equipment and work which may be needed. Factors reviewed in this feasibility review will include such characteristics as availability of three-phase service at the project site if required, circuit load capacity, annual circuit and/or line section peak and minimum loads, available short-circuit current, any existing system constraints, and protective devices affected by the proposed installation. The District contact will schedule a meeting with the customer to present and discuss the findings of the feasibility review.

An initial feasibility review is performed as a courtesy to District customers at no charge. If significant revisions are proposed to a project already proposed, a fee may be required to cover District costs to re-study the project.

#### b. System Impact Study

If the customer elects to proceed with the project based on the results of the feasibility review, the District will perform a System Impact Study (SIS). Because the District personnel time and resources required to complete this study can be significant, the customer must sign a System Impact Study Agreement and pay a fee to cover District costs to perform the study.

To provide the District with the data needed for the system models, the customer must submit a Final Application for Operation of Customer-Owned Generation (Form 6-2) along with additional information pertaining to equipment characteristics.

The SIS identifies detailed effects to be expected due to operation of the generation, and includes such analysis as power flow and short-circuit studies, and stability modeling as needed. The SIS will also provide a high level summary of technical requirements that may apply for the interconnection.

#### c. Interconnection Facilities Study

Following acceptance of the SIS, the customer may elect to request an Interconnection Facilities Study (IFS). The IFS will identify technical requirements that apply for interconnection, which may include the voltage operating range and reactive power requirements for the generator, along with the need for installation of a Power System Stabilizer to meet WECC operating criteria.



In addition, any mitigating measures required to ensure ability to detect and clear for all faults, alleviate system overloads or increases in available shortcircuit current caused by the generation, and prevent the project from islanding unintentionally with District loads will be identified.

The report will also provide detailed estimates for the work identified in the SIS which is required on the District's electrical system for the interconnection, as well as an estimate of the timeline for completing the work. The customer must sign an Interconnection Facilities Study agreement and pay a fee to cover District costs to perform the study.

Customers who have a high degree of certainty of implementing a project may choose to combine the SIS and the IFS into a single study. This can reduce the total time required for the District to complete its portion of the study phase of the project.

#### 5. Design:

Design of the interconnection must be performed by a professional engineer licensed in the state of Washington.

Once the District and the customer execute an Interconnection Agreement, design efforts may commence in accordance with the milestones identified in the agreement. Milestones will include the District providing detailed interconnection technical requirements for the project, the customer's design efforts and purchase of long-lead time equipment, and the District's design of any required modifications to the District's electrical system. The customer and the District must agree on the milestones before the Interconnection Agreement is signed.

Prior to purchase of equipment and start of construction, the District will review the design of the interconnection to verify that operation will be as intended. The review will encompass, at a minimum, the following customer documents:

- Detailed one-line diagram of the entire Generating Facility
- AC current and potential schematic of the Generating Facility
- A DC control schematic of the Generating Facility
- All electrical drawings must be stamped by a professional engineer
- Ground mat design and test data
- Equipment specifications and details



While the design review is not an endorsement of the engineering soundness of the project, it is intended to demonstrate operation of the interconnection protection to the District engineers, and will aid in reviewing or recommending relay settings for the project.

The System Protection Group performs relay setting review as the final step in the technical review. This review is intended to ensure proper clearing as required for all faults on the District electric system, as well as coordination with District protective devices.

#### 6. Construction:

The customer and the District will proceed with construction efforts in accordance with the milestones identified in the Interconnection Agreement. The District will complete required improvements to the District electrical system identified in the IFS.

#### 7. Protective Relay Testing:

Calibration testing of the required interconnection relays must be performed by a qualified test firm, and signed copies of the test reports provided to the District prior to witness testing.

When all necessary improvements to the District electric system are complete and the generation facility is complete, District representatives will witness operation of the required interconnection relays. In advance of the witness testing, the customer must provide a test plan for demonstrating operation of the required interconnection protective scheme. This shall include a step by step checklist for all required protective functions with a list of expected outcomes.

The District may ask to witness initial parallel operation of the generation facility.

#### 8. Agreements:

Before the generating facility is allowed to start commercial operation, all required agreements must be completed and signed by both the customer and the District, and witness testing completed, and a letter from the District authorizing parallel operation. These may include an Interconnection Agreement and a Power Purchase Agreement or Aggregation and Redelivery Agreement. The customer must also provide the District with proof of all agreements executed with BPA or other utility or purchaser of the plant output.

From time to time, consistent with the terms of the Interconnection Agreement, the interconnection protection package may be reviewed to ensure that it meets the technical interconnection requirements currently in effect. Any plant revisions made necessary because of changes in technical requirements must be made at the customer's expense.

#### 9. Operation:

The Interconnection Agreement identifies operating requirements for the project. Notice must be provided to the District according to the provisions of the Interconnection Agreement for any changes made to (i) the project to comply with changes in operating requirements, or applicable laws and regulations, or (ii) the point of contact for the operation and maintenance of the project.



#### **10. Sample Documents:**

Sample documents can be found at:

ESR Manual: Section 6 - Form 6-1 Preliminary Application for Generation ESR Manual: Section 6 - Form 6-2 Final Application for Generation Interconnection Facility Connection Requirements: www.snopud.com/?p=1174 Sample System Impact Study: www.snopud.com/?p=2621 Sample Interconnection Facilities Study agreement www.snopud.com/?p=2621 Sample Interconnection Agreement www.snopud.com/?p=2621 Sample Power Purchase Agreement www.snopud.com/?p=2119 Exhibit 1: Interconnection Process Flow www.snopud.com/?p=2621



#### E. Solar Net Meter Generation:


Installation of Solar Generation Production Metering must comply with the requirements in the District's Electrical Service Requirements Manual (ESR) as well as the requirements of the local electrical jurisdiction and the State of Washington.

Meters shall be permanently labeled "Production Meter" and "Net Meter" in compliance with ESR 5.F. Service Identification/Meter Labeling.

Preferred location of meters shall be adjoining as shown on the figure below when possible. If adjoining meter locations are not possible meters shall be in clear view with unobstructed safe access of each other.

Contact the District's Energy Services Department for further information.

#### Typical net metered solar installation 1Ø 25 kW or Less

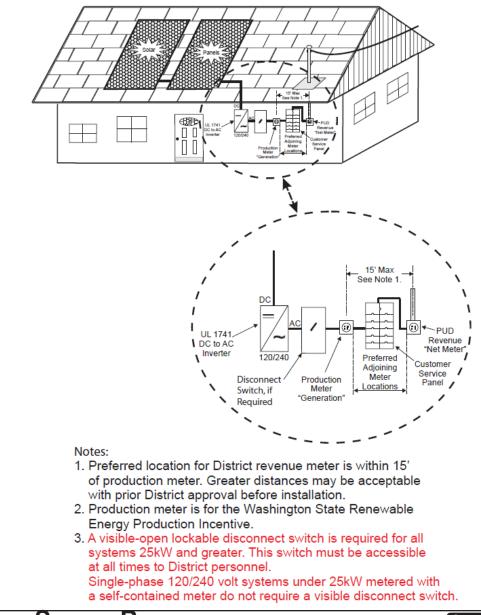



#### F. **Application Forms:**

#### SNOHOMISH COUNTY PUBLIC UTILITY DISTRICT NO. 1

Preliminary Application for Operation of Customer-Owned Generation

#### **FORM 6-1**

Who should file this application: Any customer(s) expressing interest to install generation on their premises. This application should be completed as soon as possible and returned to a District representative in order to begin processing the request.

Information: This application is used by the District to perform a Preliminary Interconnection Study to determine the interface requirements at the customer's service point. The applicant should attempt to fill in as much of the form as possible. The applicant will receive a preliminary estimate for the utility interface requirements that may be used in calculating the overall project requirements.

Further Action: The Preliminary Interconnection Study will determine the need to submit a copy of the Final Application for Parallel Operation of Customer-Owned Generation.

Equipment Testing: Prior to final approval of the customer's generation, protective and control system testing is required. District representatives and Owner representatives must be present to witness and verify the testing for proper operation.

Owner/Applicant Infor	mation			
Company				
Mailing Address				
City	County	State	Zip	
Phone	Representative			
Project Design/Engine	eering (Architect) (as applicable)			
Company				
	County		Zip	
Phone	Representative			
Electrical Contractor	(as applicable)			
Company				
City	County	State	Zip	
Phone	Representative			
Generator Data				
Manufacturer (if availabl	e)	Model		
Type: Synchronous	] Induction 🗌 Phases: Single 🗌	] Three 🗌 🛛 Free	quency (Hz)	
Rated Output:	kW		kVA	
Rated Power Factor:				
Energy Source (gas, ste	am, hydro, etc.)			
Transfer Switch Data				
Manufacturer		Model		
Туре	RatingANSI	/UL 1008 Listed?	YES 🗌	NO 🗌
What Standards does it	meet?			
Is transfer switch operat	ional in closed-transition mode? YES [	NO 🗌		
What is maximum time t	he transfer switch takes to operate?			
Can it be programmed to for more than 100 millisect	o operate in parallel with District onds (0.100 sec)? YES [			
ECTRICAL SEP	RVICE REQUIREMENTS			SNOF
10/94 Revised: 7/	12/2017 Page 6 - 17	7		PUBLIC I

Form 6-1 Preliminary Application

Estimated Load Information					
The following information will be used to help properly design the District/customer interconnection. This information is not intended as a commitment or contract for billing purposes.					
Minimum anticipated load (generation not operating)	kW	kVA			
Maximum anticipated load (generation not operating)	kW	kVA			
Description of Proposed Installation and Operation					

Please attach a single line diagram showing the customer's primary switchgear, transformers, and generation facilities. Give a general description of the manner of operation of the generation (cogeneration, peak shaving, emergency power, etc.) Please attach additional sheets if necessary.

Signature		

Applicant Signature \_\_\_\_\_ Date \_\_\_\_\_

Information below to be completed by Snohomish County Public Utility District						
PUD Customer Service Representative completes the following:						
Executive Account Rep Phone						
Project Name						
Street Address						
City County	Phone					
District service point location (Attach map if available)						
Copy of Application and attachment to:						
System Planning & Protection Manager						
* Original of this document to be retained in customer's file in Customer Service Department *						



Form 6-2 Final Application

#### SNOHOMISH COUNTY PUBLIC UTILITY DISTRICT NO. 1

Final Application for Operation of Customer-Owned Generation

#### **FORM 6-2**

**Who should file this application:** Customers defined by the Preliminary Interconnection Study performed by the District as having generation capable of operating in parallel with the District system. This application should be completed as soon as possible and returned to a District Representative in order to begin processing the request.

**Information:** This application is used by the District to perform a Final Interconnection Study to determine the required equipment configuration for the District/customer interface. Every effort should be made to supply as much information as possible.

Additional Requirements: In addition to the items listed on this form, please attach a detailed one-line diagram of the proposed facility, all applicable elementary diagrams of major equipment (generators, transformers, inverters, circuit breakers, protective relays, etc.), specifications, test reports, etc., and any other applicable drawings or documents necessary for the proper design of the interconnection.

**Equipment Testing:** Prior to final approval of the customer's generation, protective and control system testing is required. District representatives and Owner representatives must be present to witness and verify the testing for proper operation.

Owner/Applicant Information			
Company			
Mailing Address			
City County		State	Zip
Phone	Representative		
Project Design/Engineering (Architect) (as	applicable)		
Company			
Mailing Address			
City County			
Phone	Representative		
Electrical Contractor (as applicable)			
Company			
Mailing Address			
City County		_ State	Zip
Phone			
Estimated Load Information			
The following information will be used to help p information is not intended as a commitment o			interconnection. This
Minimum anticipated load (generation not open	rating)	kW	kVA
Maximum anticipated load (generation not ope	erating)	kW	kVA
LECTRICAL SERVICE REQU	IREMENTS		



New: 10/94

Revised: 7/12/2017

Form 6-2 Final Application

# Please complete all applicable items. Copy this page as required for additional generators.

Synchronous Generator Data				
Unit No.(s)	Total number	of units with li	sted specifications or	n site
Manufacturer		Mfg	. Date	
Serial No. (each)				
Phases: Single Three				
Rated Output (for one unit)		kW		kVA
Rated Power Factor % Rat	ed Voltage (Vo	olts)	Rated Ampe	eres
Field Volts Field A	Amps		Motoring Power (kW)	
Synchronous Reactance (Xd)	% on		k	VA base
Transient Reactance (X'd)	% on		k	VA base
Subtransient Reactance (X"d)	% on		ŀ	VA base
Negative Sequence Reactance (Xs)	% c	on	ŀ	VA base
Zero Sequence Reactance (Xo)	% c	on	k	VA base
Neutral Grounding Resistor (if applicable	e)			
Induction Generator Data				
Rotor Resistance (Rr)	ohms	Stator Resi	stance (Rs)	ohms
Rotor Reactance (Xr)	ohms		tance (Xs)	
Magnetizing Resistance (Xm)	ohms	Short Circu	it Resistance (Xd") _	ohms
Design Letter		Frame Size		
Exciting Current		Temp Rise	(°C)	
Reactive Power Required	Vars			
Additional information				
Prime Mover (please complete all applied	cable items)			
Unit No.		Туре		
Manufacturer				
Mfg. Date HP Rated	HP	Max	Inertia Consta	ntlb-ft <sup>2</sup>
Energy Source (hydro, steam, wind, etc.				

Page 6 - 20

ELECTRICAL SERVICE REQUIREMENTS New: 10/94 Revised: 7/12/2017

Form 6-2 Final Application

Generator Transformer (please complete all applicable items)						
Transformer (between genera	tor and utility system	)				
Generator Unit No.						
Manufacturer						
Serial No.						
High Voltage			wye, Ne	utral solidly g	grounded?	
Low Voltage	_ kV, Connection: _	delta	wye, Ne	utral solidly g	grounded?	
Transformer Imepdance (Z)	% on			H	<va base<="" td=""></va>	
Transformer Resistance (R) _	% on			H	<va base<="" td=""></va>	
Transformer Reactance (X)	% on			ł	<va base<="" td=""></va>	
Neutral Grounding Resistor (ii	f applicable)					
Inverter Data (if applicable)						
Manufacturer			Мо	del		
Rated Power Factor	% Rated Voltage	(Volts)		Rated Amp	eres	
Inverter Type (ferroresonant,	step, pulse-width mod	dulation, etc.)				
Type Commutation: Forced	Li	ne				
Harmonic Distortion: N	laximum Single Harn	nonic %				
Maximum Total Harmonic %						
<b>NOTE</b> : Please attach all avai voltage and current waveform		t reports, and	l oscillograpl	nic prints sho	wing inverter output	
Power Circuit Breaker (if ap)	plicable)					
Manufacturer			Мо	del		
Rated Voltage (kV)						
Interrupting Rating (Amperes)						
Interrupting medium/Insulatin						
Control Voltage (closing):			DC			
Control Voltage (tripping):	Volts	AC	DCE	Battery	_ Charged Capacitor	
Close Energy: Spring						
Trip Energy: Spring	Spring Motor Hydraulio					
Bushing Current Transformers	s Max	. Ratio		Relay Accu	racy Class	
Multi ratio:Yes		ps)				
Miscellaneous (Please use ti	his area and any add	itional sheets	for applicabl	e notes and	comments)	

SNOHOMISH COUNTY				
	ر			
PUBLIC UTILITY DISTRICT NO. 1				

Form 6-2 Final Application

Signature					
The customer agrees to provide Snohomish County Public Utility District with additional information required to complete the interconnection. The customer shall operate his equipment within the guidelines set forth by the <i>Interconnection Requirements for Customer-Owned Generating Facility Connected to District Distribution/High Voltage System.</i>					
Applicant Signature	Date				
Information below to be completed by Snoho	mish County Public U	tility District			
PUD Customer Service Representativ	e completes the follow	ving:			
Executive Account Rep	Phone				
Project Name					
Street Address					
City County	Phone				
District service point location (Attach map if available)					
Equipment Testing Testing performed and witnessed for proper operation on	I	by:			
Owner Owner Rep	Contractor				
Executive Account Rep	System Protection Rep				
Project Designer / Engineer	Construction Rep				
Miscellaneous Comments / Notes					
Copy of Application and Attachments to:					
Power & Business Services AGM Transmission & Distribution Engineering Services Manager					
System Planning & Protection Manager					
Distribution Construction Services Manager					
* Original of this document to be retained in customer's file in Customer Service Department *					

Page 6 - 22

